


Large Axial Fans



Large Axial Fans




Model	Size in inch	Poles	Phase	Voltage (VAC)	Current (A)	Power (W)	Speed (RPM)	Airflow (M³/hr)	Airflow (CFM)	Noise dBA	Capacitor uf	wt Kg
2E-200	8	2	Single	230	0.30	65	2400	850	500	55	2	2.5
4E-200	8	4	Single	230	0.21	45	1450	450	265	46	1.5	2.5
4D-200	8	4	Three	415	0.12	35	1450	450	265	46	-	2.5
2D-200	8	2	Three	415	0.22	80	2400	850	500	55	-	2.5
2E-250	10	2	Single	230	0.55	115	2400	1730	1018	65	3/3.15	3.0
4E-250	10	4	Single	230	0.30	60	1400	950	559	53	2	3.0
4D-250	10	4	Three	415	0.25	60	1400	950	559	53	-	3.0
2D-250	10	2	Three	415	0.25	115	2400	1730	1018	65	-	3.0
2E-300	12	2	Single	230	0.65	145	2300	2300	1354	65	4	3.3
4E-300	12	4	Single	230	0.42	85	1380	1850	1089	54	3/3.15	3.3
4D-300	12	4	Three	415	0.22	80	1380	1850	1089	54	-	3.3
2D-300	12	2	Three	415	0.35	145	2300	2300	1354	65	-	3.3
4E-350	14	4	Single	230	0.65	140	1380	2600	1530	58	4	4.9
4D-350	14	4	Three	415	0.38	140	1380	2600	1530	58	-	4.9
4E-400	16	4	Single	230	0.82	180	1380	4000	2354	65	6	5.6
6E-400	16	6	Single	230	0.52	108	920	3300	1942	59	3	5.6
4D-400	16	4	Three	415	0.47	180	1380	4000	2354	65	-	5.6

Frequency (Hz) - 50
E-Single Phase D- Three Phase

All models available in Suction (S) and Blow (B)
Also available 115VAC

Specifications subject to change without notice
Also available in 6 pole motors

Large Axial Fans

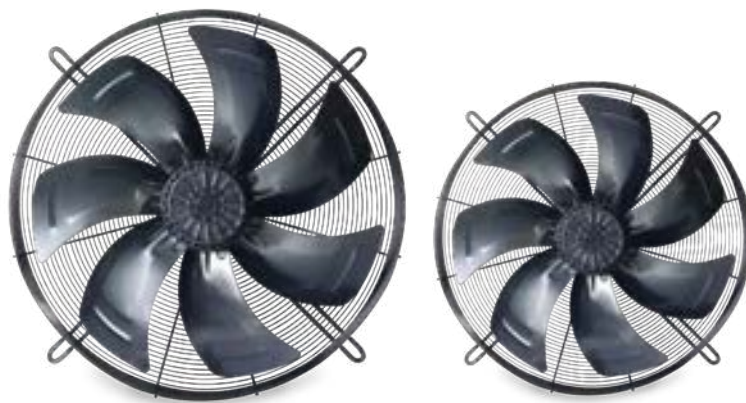


Model	Size in inch	Poles	Phase	Voltage (VAC)	Current (A)	Power (W)	Speed (RPM)	Airflow (M³/hr)	Airflow (CFM)	Noise dBA	Capacitor uf	wt Kg
4E-450	18	4	Single	230	1.2	250	1380	5500	3237	66	8	7.2
6E-450	18	6	Single	230	0.70	120	920	3780	2223	61	4	7.2
4D-450	18	4	Three	415	0.6	250	1380	5500	3237	66	-	7.2
4E-500	20	4	Single	230	1.75	380	1320	7200	4237	71	10	9.0
6E-500	20	6	Single	230	1.00	180	950	5720	3366	66	8	9.0
4D-500	20	4	Three	415	1.20	450	1410	7400	4355	71	-	9.0
4E-550	22	4	Single	230	2.55	600	1300	8500	5002	72	12	11.0
4D-550	22	4	Three	415	1.15	500	1400	8900	5238	72	-	11.0
4E-600	24	4	Single	230	3.2	700	1360	10040	5909	74	16	14.0
4D-600	24	4	Three	415	1.60	765	1370	11000	6478	74	-	14.0
6D-600	24	6	Three	415	1.6	520	950	9885	5818	70	-	14.0
4D-630	25	4	Three	415	1.6	815	1320	12420	7310	75	-	15.0
6D-630	25	6	Three	415	1.6	550	900	11785	6936	71	-	15.0
6D-710	28	6	Three	Δ415	1.9	900	900	15120	8899	73	-	30.0
6D-710	28	6	Three	Y415	1.15	650	730	13050	7681	72	-	30.0
6D-800	32	6	Three	Δ415	2.85	1200	920	20695	12181	75	-	35.0
6D-800	32	6	Three	Y415	1.65	930	770	17635	10380	74	-	35.0

Frequency (Hz) - 50
E-Single Phase D- Three Phase

All models available in Suction (S) and Blow (B)
Also available 115VAC

Specifications subject to change without notice
Also available in 6 pole motors


Basket Grill

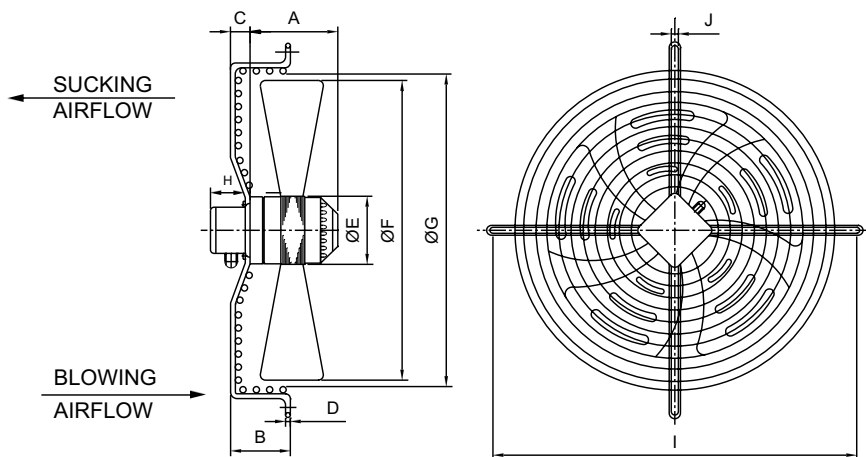

Dimensions (mm)

Size	A	B	C	D	E	F	G	H	I	J
200	66	45	-	4	92	200	220	60	260	7
250	76	55	-	4	92	250	275	60	320	7
300	86	80	30	4	92	300	320	60	360	7
350	104	80	30	5	102	350	370	60	422	9.5
400	117	90	30	5	102	400	420	60	470	9.5
450	130	90	30	6	102	450	470	60	522	9.5
500	129	90	30	6	137	500	520	60	570	10.5
550	144	100	30	6	137	550	570	60	622	10.5
600	164	100	30	7.5	137	600	620	60	679	10.5
630	164	100	30	7.5	137	630	650	60	750	10.5
710	191	175	55	10	180	703	770	60	840	14.0
800	191	175	55	10	180	784	857	60	920	14.0

Flat Grill

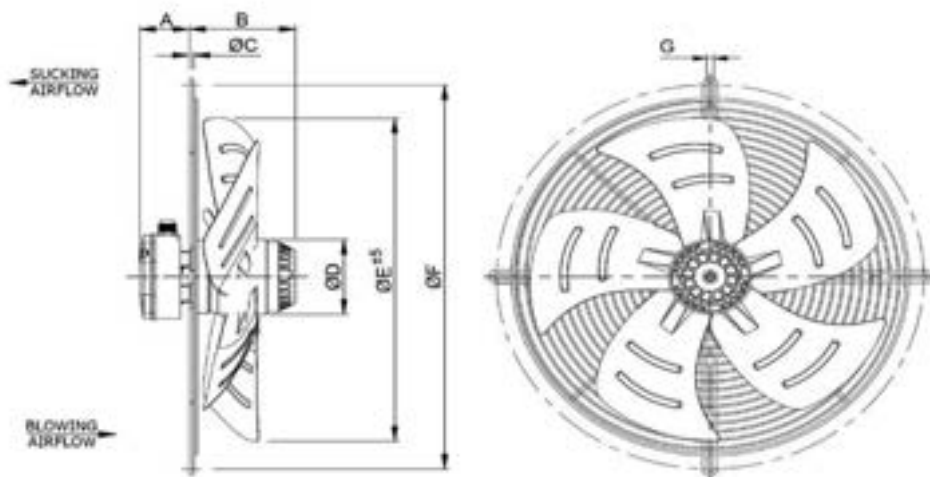

Dimensions (mm)

Size	A	B	C	D	E (+/-5)	F	G
200	60	66	4	92	200	260	6.5
250	60	76	4	92	250	320	6.5
300	60	86	4	92	300	360	7
350	60	109	5	102	350	422	9.5
400	60	122	5	102	400	470	9.5
450	60	135	5	102	450	522	9.5
500	60	133	6	137	500	570	10.5
550	60	143	6	137	550	622	9.3

